




Mur-lok[®] RO-Pal

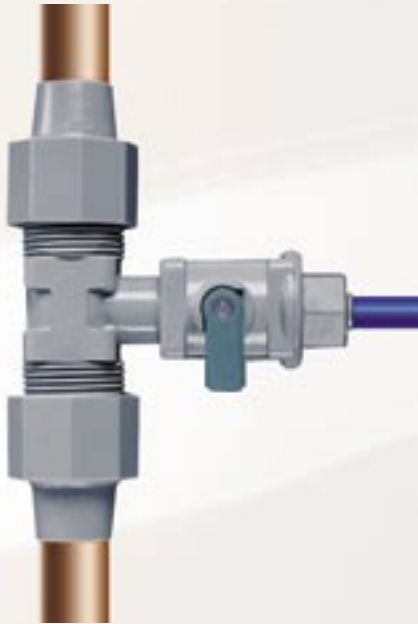

When you require a supply connection for connecting your Reverse Osmosis or In-line Filter System to rigid pipe, including copper, the Mur-lok[™] RO Pal is the only reliable choice. The RO Pal is an easy to install replacement for traditional piercing valves. The integrated ball valve allows for a positive shut off for servicing POU equipment.

RO-Pal Features:


- Full flow rate to POU systems
- All plastic design eliminates corrosion
- Easy installation in 5 minutes or less
- For use on copper, chrome, CPVC, PEX tubing

Temperatures & Pressures

Pressure	0 - 150 p.s.i.
Temperature	33° - 140°F (1°-60° C)

Mur-lok[®] RO-Pal Valves

Item #	Pipe ID	Pipe OD	Ball Valve End	Length A	Width B
A0630405	1/4"	3/8"	1/4" Female NPTF	4.1"	3.3"
A0630425	1/4"	3/8"	1/4" Mur-lok [®]	4.1"	3.3"
A0630625	1/4"	3/8"	3/8" Mur-lok [®]	4.1"	3.3"
A0630825	1/4"	3/8"	1/2" Mur-lok [®]	4.1"	3.3"
A0830405	3/8"	1/2"	1/4" Female NPTF	4.1"	3.3"
A0830425	3/8"	1/2"	1/4" Mur-lok [®]	4.1"	3.3"
A0830605	3/8"	1/2"	3/8" Female NPTF	4.1"	3.3"
A0830625	3/8"	1/2"	3/8" Mur-lok [®]	4.1"	3.3"
A0830825	3/8"	1/2"	1/2" Mur-lok [®]	4.1"	3.3"
A1030405	1/2"	5/8"	1/4" Female NPTF	4.6"	3.4"
A1030425	1/2"	5/8"	1/4" Mur-lok [®]	4.6"	3.4"
A1030605	1/2"	5/8"	3/8" Female NPTF	4.6"	3.4"
A1030625	1/2"	5/8"	3/8" Mur-lok [®]	4.6"	3.4"
A1030825	1/2"	5/8"	1/2" Mur-lok [®]	4.6"	3.4"
A1430405	3/4"	7/8"	1/4" Female NPTF	4.6"	3.4"
A1430425	3/4"	7/8"	1/4" Mur-lok [®]	4.6"	3.4"
A1430625	3/4"	7/8"	3/8" Mur-lok [®]	4.6"	3.4"
A1430825	3/4"	7/8"	1/2" Mur-lok [®]	4.6"	3.4"

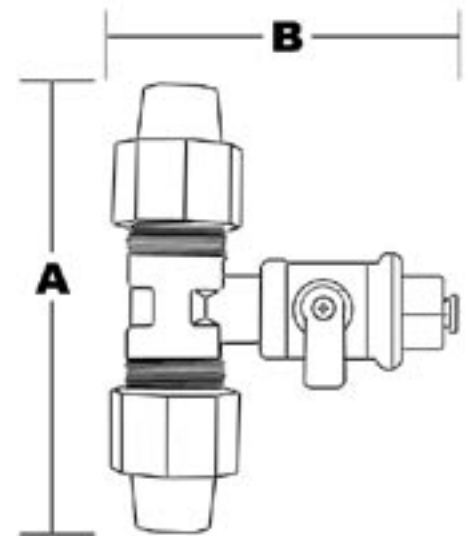

* Please contact us for additional configurations.

G.A. Murdock, Inc.

Phone: 800-568-7565 or 605-256-9632
 Fax: 800-568-4301 or 605-256-9682
 Web: www.gamurdock.com
 Email: sales@gamurdock.com