



M A X™

**CARBON FILTERS FOR MAXIMUM
WATER QUALITY IMPROVEMENT**

Thick wall carbon block cartridges for long life and increased chlorine taste and odor reduction*. Reduces: Giardia, Entamoeba, Toxoplasma and Cryptosporidium Cysts, Certain VOC's, Chlorine Taste and Odor, Extra Fine Sediment and Rust Particles*. MAXCYST Series cartridges are manufactured using a patented process and are made entirely from FDA-approved materials. They are an ideal choice for a wide range of residential, food service, commercial and industrial applications.

- **Solid block activated carbon for long life**
- **Thick wall for greater chlorine taste and odor reduction***
- **0.5 micron nominal filtration for cyst reduction***
- **Highly effective chlorine reduction through 20,000 gallons at 1 GPM flow rate* (MAXCYST-975)**

*Not Performance Tested or Certified by NSF




MAXCYST-975

MAXCYST-20

MAXCYST-FF20

MAXCYST-FF975

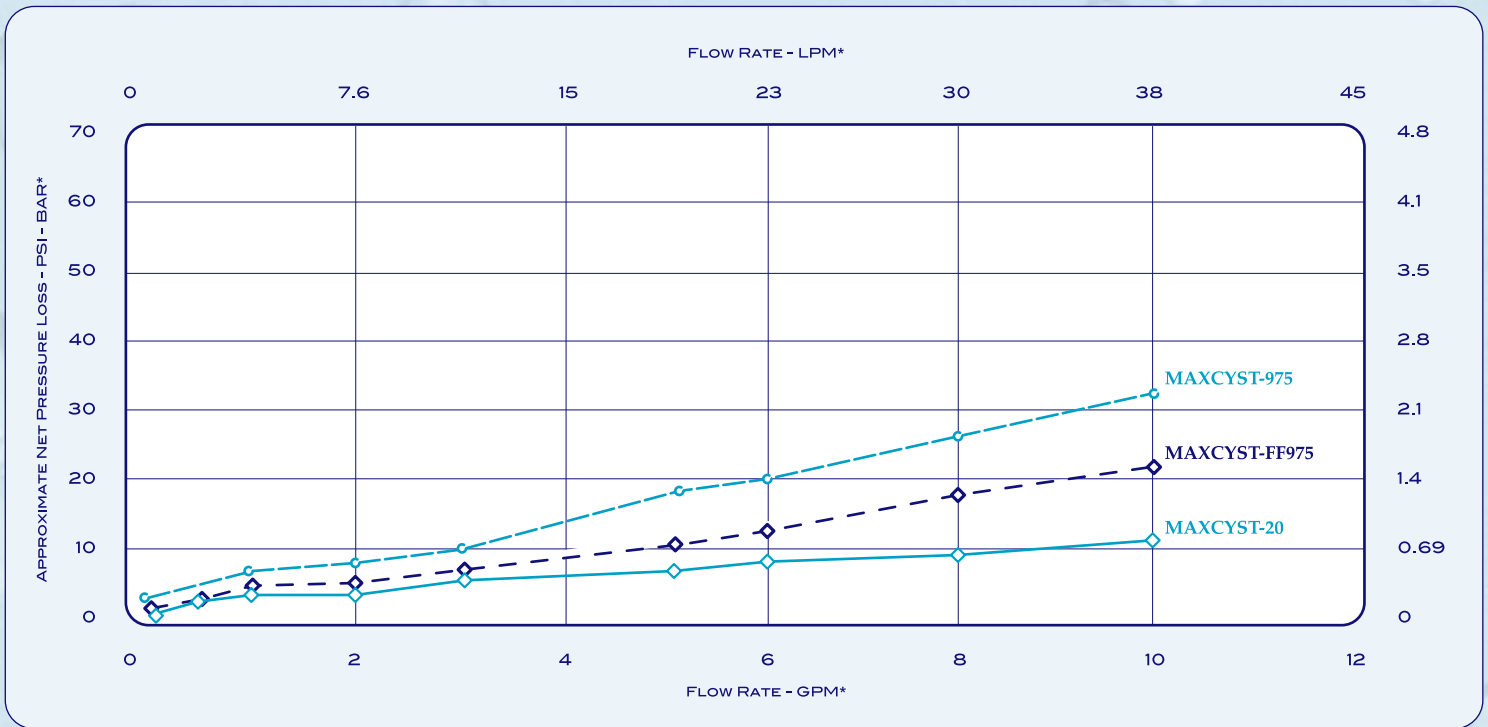

Model	Maximum Dimensions	Initial Δp (PSI) @ Flow Rate (GPM)*	Micron Rating (Nominal)*	Chlorine Taste and Odor Reduction @ Flow Rate (GPM)*
MAXCYST-975	2-7/8" x 9-3/4" (73mm x 247mm)	3.7 psi @ 1 gpm (0.26 bar @ 3.8 lpm)	0.5	>20,000 gallons @ 1 gpm (>75,700 liters @ 3.8 lpm)
MAXCYST-20	2-7/8" x 20" (73mm x 508mm)	3.0 psi @ 2 gpm (0.21 bar @ 7.6 lpm)	0.5	>45,000 gallons @ 2 gpm (>170,300 liters @ 7.6 lpm)
MAXCYST-FF975	4-5/8" x 9-3/4" (117mm x 247mm)	4.6 psi @ 2 gpm (0.32 bar @ 7.6 lpm)	0.5	>50,000 gallons @ 2 gpm (>189,300 liters @ 7.6 lpm)
MAXCYST-FF20	4-5/8" x 20" (117mm x 508mm)	8.5 psi @ 4 gpm (0.59 bar @ 15.1 lpm)	0.5	>150,000 gallons @ 4 gpm (>567,800 liters @ 15.1 lpm)

- Solid block activated carbon for long life
- Greater chlorine taste and odor reduction*
- 0.5 micron nominal filtration*
- Highly effective chlorine reduction through 20,000 gallons at 1 GPM flow rate* (MAXCYST-975)

Carbon block cartridges for long life and increased chlorine taste and odor reduction*. Reduces: Giardia Entamoeba, Toxoplasma and Cryptosporidium Cysts, Chlorine Taste and Odor, Sediment and Rust Particles*. **Micron Rating: 0.5 micron (nominal)*. Temperature range: 40-165° (4.4-73.8°C)*.**

NOTE: Estimated capacity using 2 ppm free available chlorine (FAC) at continuous flow with greater than 90% reduction*. Performance capacity depends on system design, flow rate and certain other application conditions.

All information presented is based on data believed to be reliable. It is offered for evaluation and verification, but is not to be considered a warranty of any kind.

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

* Not Performance Tested or Certified by NSF
 U.S. Patent No. 5,976,432 and 5,823,668
 © 2003, Flowmatic Systems, Inc.
 Printed In U.S.A. 4/03 MAXCYST01



The MAXCYST series is tested and certified by NSF International under NSF/ANSI Standard 42 for material requirements only.