



**M A X**™

**CARBON FILTERS FOR MAXIMUM  
WATER QUALITY IMPROVEMENT**

Acid washed coconut shell carbon block cartridges for improved taste and increased chlorine taste and odor reduction. Reduces: Sediment and Rust Particles, Chlorine Taste and Odor\*. MAXT Series cartridges are manufactured using a patented process which yields a cartridge with a nominal 5 micron filtration rating\*. A thin wall, high porosity design helps prevent the cartridge from plugging before its adsorption capacity is exhausted, maximizing the utilization of the carbon while maintaining low pressure drop\*.

- **Solid block activated carbon for long life**
- **Improved, sweeter taste, ideal post RO membrane filter**
- **0.5 micron nominal filtration for cyst reduction\***
- **Effective chlorine reduction through 5,000 gallons at 1 GPM flow rate\* (MAXT-975)**

\*Not Performance Tested or Certified by NSF





MAXT-975

MAXT-20

MAXT-FF20

MAXT-FF975

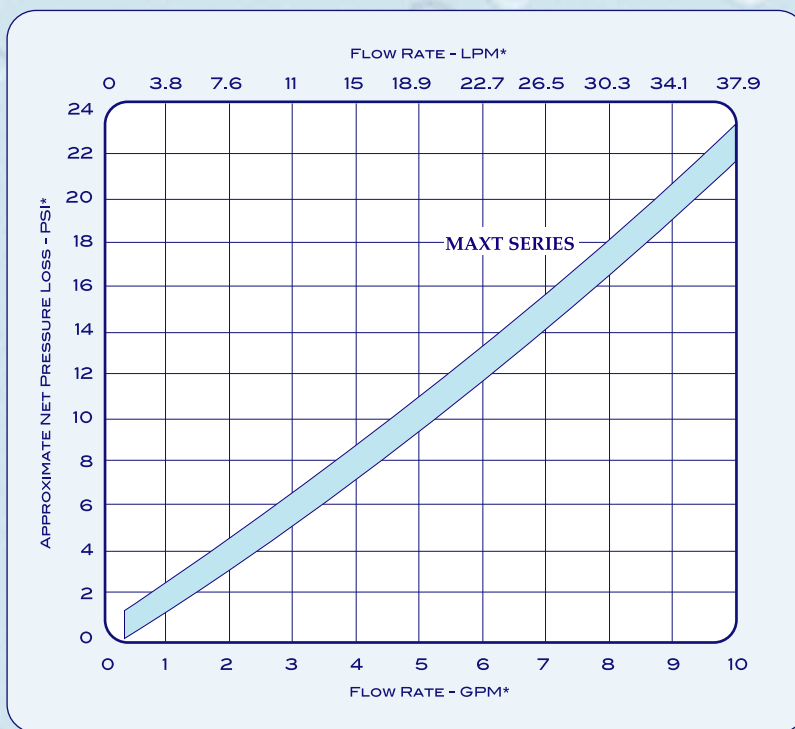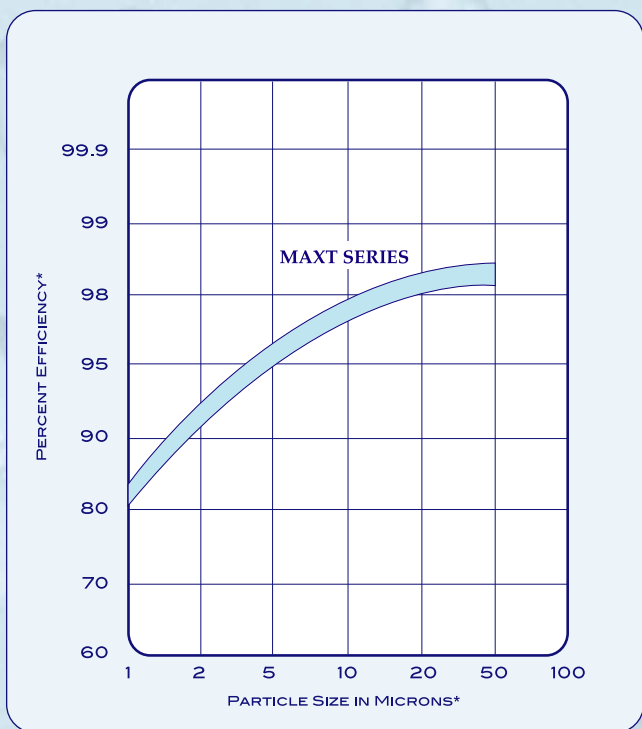

Model	Maximum Dimensions	Initial $\Delta p$ (PSI) @ Flow Rate (GPM)*	Micron Rating (Nominal)*	Chlorine Taste and Odor Reduction @ Flow Rate (GPM)*
MAXT-975	2-7/8" x 9-3/4" (73mm x 247mm)	1.5 psi @ 1 gpm (0.1 bar @ 3.8 lpm)	5	>5,000 gallons @ 1 gpm (>18,900 liters @ 3.8 lpm)
MAXT-20	2-7/8" x 20" (73mm x 508mm)	1.35 psi @ 2 gpm (0.09 bar @ 7.6 lpm)	5	>10,000 gallons @ 1 gpm (>37,800 liters @ 3.8 lpm)
MAXT-FF975	4-5/8" x 9-3/4" (117mm x 247mm)	1.90 psi @ 2 gpm (0.13 bar @ 7.6 lpm)	5	>18,000 gallons @ 2 gpm (>68,100 liters @ 7.6 lpm)
MAXT-FF20	4-5/8" x 20" (117mm x 508mm)	2.95 psi @ 4 gpm (0.2 bar @ 15 lpm)	5	>32,000 gallons @ 4 gpm (>120,100 liters @ 15 lpm)

- Solid block activated carbon for long life
- Greater chlorine taste and odor reduction\*
- 5 micron nominal filtration\*
- Effective chlorine reduction through 5,000 gallons at 1 GPM flow rate\* (MAXT-975)

Acid washed coconut carbon block cartridges for improved taste and increased chlorine taste and odor reduction\*. Reduces: Chlorine Taste and Odor, Sediment and Rust Particles\*. **Micron Rating: 0.5 micron (nominal).** **Temperature range: 40-165° (4.4-73.8°C)\*.**

**NOTE:** Estimated capacity using 2 ppm free available chlorine (FAC) at continuous flow with greater than 90% reduction\*. Performance capacity depends on system design, flow rate and certain other application conditions.

All information presented is based on data believed to be reliable. It is offered for evaluation and verification, but is not to be considered a warranty of any kind.

**WARNING:** Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

\* Not Performance Tested or Certified by NSF  
U.S. Patent No. 5,976,432 and 5,823,668  
© 2003, Flowmatic Systems, Inc.  
Printed In U.S.A. 4/03 MAXT01



The MAXT series is tested and certified by NSF International under NSF/ANSI Standard 42 for material requirements only.