



M A X™

**CARBON FILTERS FOR MAXIMUM
WATER QUALITY IMPROVEMENT**

Carbon block cartridges for comprehensive drinking water filtration. Reduces: Giardia, Entamoeba, Toxoplasma and Cryptosporidium Cysts, Chlorine Taste and Odor, Fine Sediment and Rust Particles*. MAXVOC Series cartridges are manufactured using a patented process and are made from a water-washed, coconut-carbon formulation. This process and media yields a cartridge with high chlorine taste and odor removal capacity and twice the VOC reduction capacity of our MAXCYST Series cartridges*.

- **Solid block activated carbon for long life**
- **Reduction of VOC's through 1,200 gallons* (MAXVOC-975)**
- **0.5 micron nominal filtration for cyst reduction***
- **Extended chlorine reduction through 20,000 gallons at 1 GPM flow rate* (MAXVOC-975)**

*Not Performance Tested or Certified by NSF





MAXVOC-975

MAXVOC-20

MAXVOC-FF20

MAXVOC-FF975

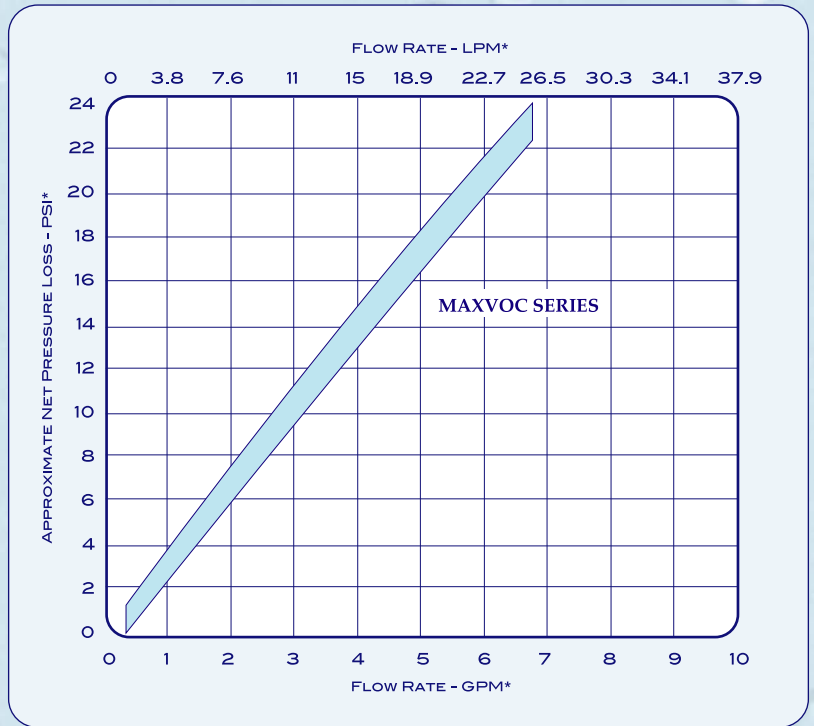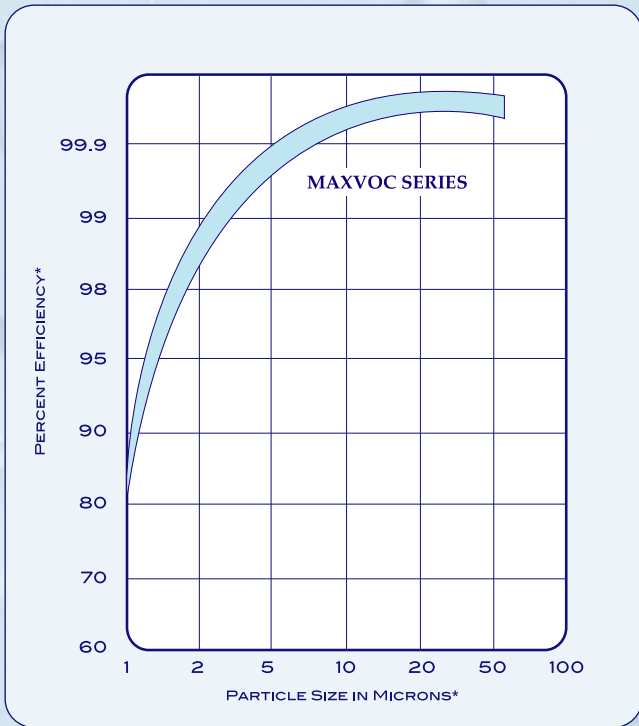

Model	Maximum Dimensions	Initial Δp (PSI) @ Flow Rate (GPM)*	Micron Rating (Nominal)*	Chlorine Taste and Odor Reduction @ Flow Rate (GPM)*
MAXVOC-975	2-7/8" x 9-3/4" (73mm x 247mm)	3.7 psi @ 1 gpm (0.26 bar @ 3.8 lpm)	0.5	>20,000 gallons @ 1 gpm (>75,700 liters @ 3.8 lpm)
MAXVOC-20	2-7/8" x 20" (73mm x 508mm)	3.0 psi @ 2 gpm (0.21 bar @ 7.6 lpm)	0.5	>45,000 gallons @ 2 gpm (>170,300 liters @ 7.6 lpm)
MAXVOC-FF975	4-5/8" x 9-3/4" (117mm x 247mm)	4.6 psi @ 2 gpm (0.32 bar @ 7.6 lpm)	0.5	>50,000 gallons @ 2 gpm (>189,300 liters @ 7.6 lpm)
MAXVOC-FF20	4-5/8" x 20" (117mm x 508mm)	8.5 psi @ 4 gpm (0.59 bar @ 15.1 lpm)	0.5	>150,000 gallons @ 4 gpm (>567,800 liters @ 15.1 lpm)

- Solid block activated carbon for long life
- Greater chlorine taste and odor reduction*
- 0.5 micron nominal filtration*
- Extended chlorine reduction through 20,000 gallons at 1 GPM flow rate* (MAXVOC-975)

Coconut shell carbon block cartridges for lead and cyst reduction*. Reduces: Lead, VOC's, Giardia Entamoeba, Toxoplasma and Cryptosporidium Cysts, Chlorine Taste and Odor, Fine Sediment and Rust Particles*. **Micron Rating: 0.5 micron (nominal)*. Temperature range: 40-165° (4.4-73.8°C)*.**

NOTE: Estimated capacity using 2 ppm free available chlorine (FAC) at continuous flow with greater than 90% reduction*. Performance capacity depends on system design, flow rate and certain other application conditions.

All information presented is based on data believed to be reliable. It is offered for evaluation and verification, but is not to be considered a warranty of any kind.

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

* Not Performance Tested or Certified by NSF
U.S. Patent No. 5,976,432 and 5,823,668
© 2003, Flowmatic Systems, Inc.
Printed In U.S.A. 4/03 MAXVOC01



The MAXVOC series is tested and certified by NSF International under NSF/ANSI Standard 42 for material requirements only.