

Mur-lok[®] Check Valves



Mur-lok[®] Check Valves


| Item # | Description |
|----------|------------------|
| J0422426 | 1/4" Check Valve |
| J0622626 | 3/8" Check Valve |
| J0822826 | 1/2" Check Valve |

Temperatures & Pressures

| | |
|------------------|---------------|
| 150 p.s.i @ 70°F | 10 Bar @ 20°C |
| 60 p.s.i @ 140°F | 4 Bar @ 60°C |

Check Valve Features:

- Chemical Resistant Polypropylene Body & Collets
- Acetal Check Valve Insert
- Leak Resistant Dual-EPDM O-rings
- 0.3 psi Cracking Pressure
- Allows flows in one Direction Only
- Designed for Clear Water Only
- For use with Plastic or Soft Metal Tubing

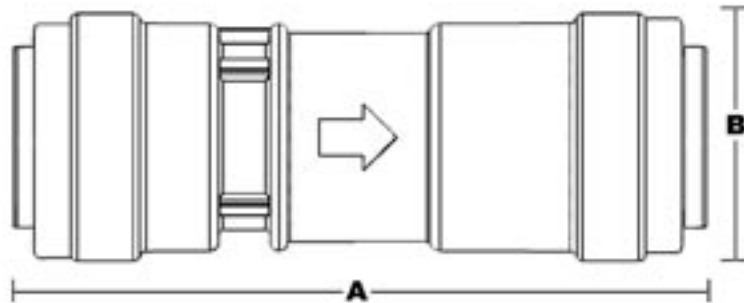

Dimensions

| Size | Length (A) | Diameter (B) |
|------|-----------------|-----------------|
| 1/4" | 1.82" (46.2 mm) | 0.63" (16 mm) |
| 3/8" | 2.44" (61.9 mm) | 0.80" (20.3 mm) |
| 1/2" | 2.62" (66.5 mm) | 0.94" (23.8 mm) |

G.A. Murdock, Inc.

Phone: 800-568-7565 or 605-256-9632
 Fax: 800-568-4301 or 605-256-9682
 Web: www.gamurdock.com
 Email: sales@gamurdock.com